

RHA ALUMINUM EQUIPMENT ACCESS ROOF HATCH

Application

Acudor Equipment Access Roof Hatches are designed to provide convenient, economical access to the roof of a building where larger openings are required. This opening allows for equipment to be installed or removed from a building through the roof.

Features RHA

- Weather tight construction
- 12" high insulated curb
- Stainless Steel Hardware
- Convenient one-hand operation
- Supports 40lbs./sq. ft. live load

Optional Features RHA

- Painted and Anodized finishes
- Louvered Curbs
- Curb pitch corrected for sloped roof
- Higher curb heights for "green roof" applications
- Polycarbonate domes for daylighting
- Curb Mounted Units

RHA Specifications:

Cover: Double-skin construction ("in box type design") with 1" Polyiso (R-6) insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs./sq. ft., the cover is 1/8" thick aluminum with a 20 gauge aluminum inside liner.



Curb: 1/8" thick aluminum with 1" thick Polyiso (R-6) insulation at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes.

Hinge: Heavy duty Aluminum pintle hinges with 3/8" SS pin

Opening: Gas spring operators allow cover to open and close with ease. Stainless Steel Inside pull handle allows for easy control when closing cover.

Door Latch: Self latching, Stainless steel outside T handle with stainless steel inside lock and lever assembly. Unit also has inside and outside padlock provisions.

Finish: Mill finish.

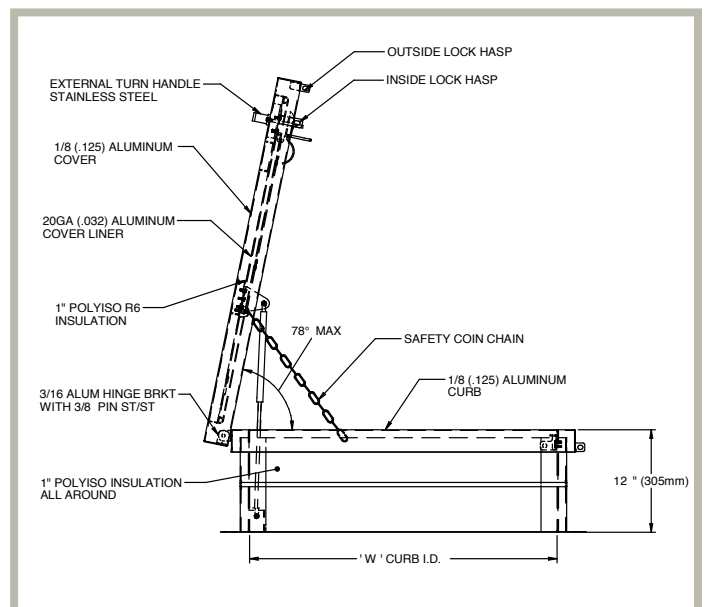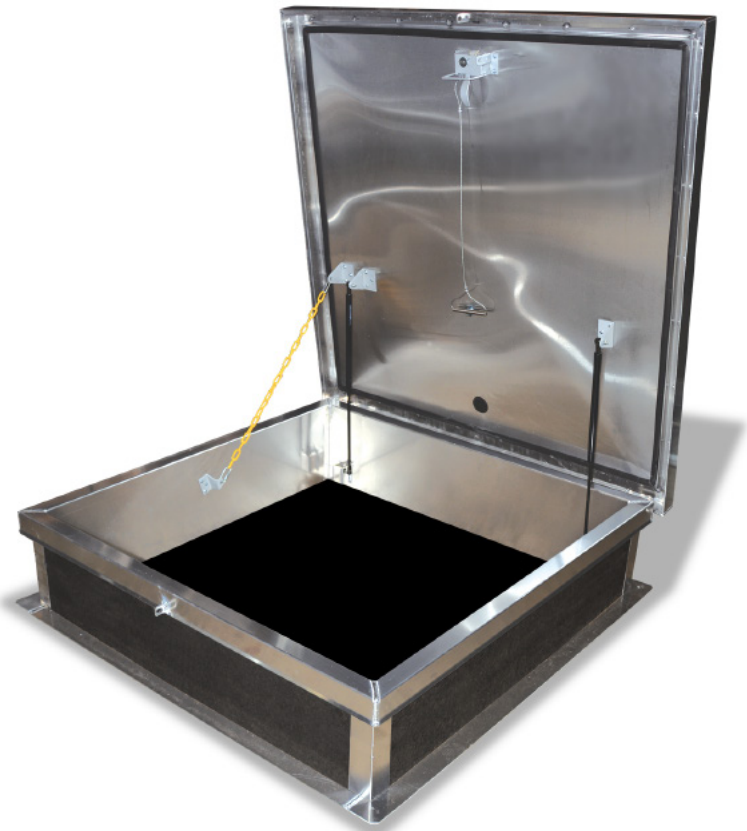

RHA STANDARD SIZES (other sizes available)

Model	Curb ID W&L inches (mm)	Weight per Hatch lbs. (kg.)
A5656	48 x 48 (1219 x 1219)	115 (52.3)

For detailed specifications see submittal sheet