



ACUDOR


www.acudor.com
U.S.A.: info@acudor.com / 800.722.0501
CANADA: info@acudor.ca / 844.228.3671
INTERNATIONAL: info@acudorintl.com
(905) 428.2240

ACD-2064



STEEL DRYWALL ACOUSTICAL ACCESS DOOR

QTY.	NOMINAL SIZE	A	B	C	D	E	F	LOCK
	12 X 12 (305 X 305)	11.57 (294)	11.82 (300)	14.48 (368)	14.48 (368)	12.04 (306)	12.04 (306)	1
	18 X 18 (457 X 457)	17.57 (446)	17.82 (453)	20.48 (520)	20.48 (520)	18.04 (458)	18.04 (458)	1
	24 X 24 (610 X 610)	23.57 (599)	23.82 (605)	26.48 (673)	26.48 (673)	24.04 (611)	24.04 (611)	1
	24 X 36 (610 X 914)	23.57 (599)	35.82 (910)	26.48 (673)	38.48 (977)	24.04 (611)	36.04 (915)	2

ACOUSTIC RATING:
THIS DOOR HAS BEEN TESTED AND EVALUATED TO ASTM: E90(09),
ASTM: E413(16), ASTM:E1332(16) AND CERTIFIED TO STC RATING 64
AND OITC RATING 53

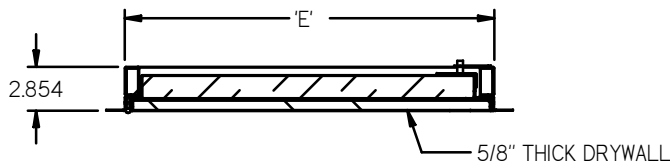


MATERIAL:
18GA (.052") SATIN COAT STEEL

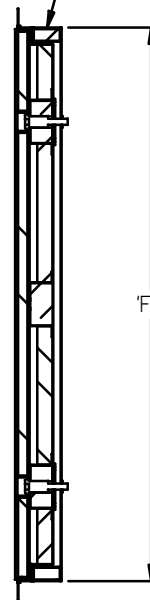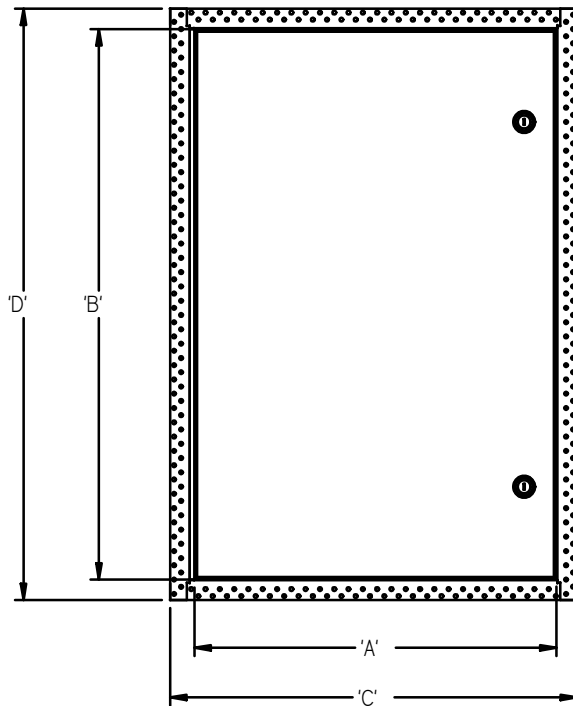

STANDARD FEATURES: SLOTTED COMPRESSION LATCH

LOCK OPTIONS:



JOB NAME:

APPROVED BY:

CUSTOMER:

DATE: