

# HD-5070-F

## DUCT DOORS for Ductboard/Fiberglass ducts

### Application

- Economical access to fiberglass ducts

### Product Features

- These doors are for use in low to medium pressure fiberglass ducts
- Hinged door panel

### Options

- Aluminum, stainless steel

### HD-5070F "Hinged" Fiberglass Doors Specifications:

**Material:** Galvanized steel

**Door:** 24 gauge


**Mounting Frame:** 24 gauge

**Gasketing:** 1/8" thick by 1/2" wide closed cell neoprene gasketing  
between door and frame and also between frame and duct.

**Insulation:** 1" Micro-AIRC M/F TYPE-475 R value 7.7

**Hinge:** Continuous aluminum piano hinge

**Latch:** Self tightening, hand operated cam latch

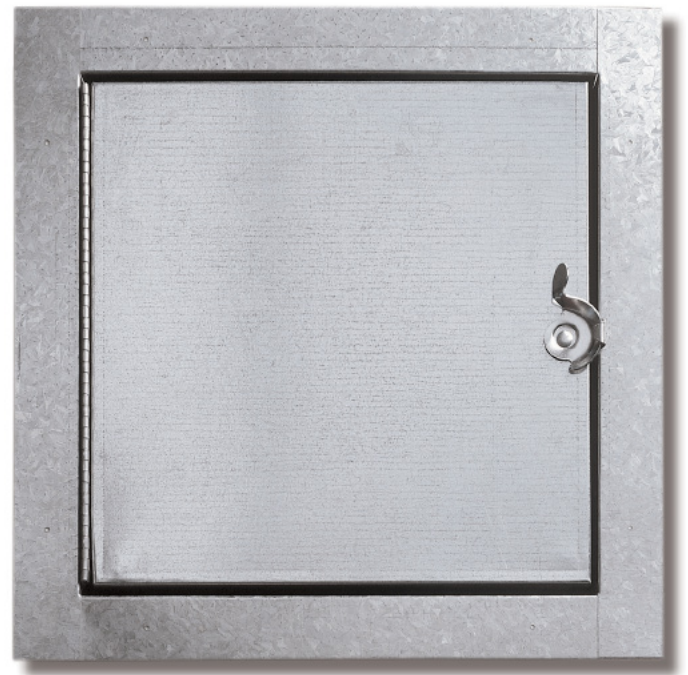

### HD-5070-F STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
6 x 6	152 x 152	2	1.0	0.5
8 x 8	203 x 203	2	1.25	0.6
10 x 10	254 x 254	2	2.0	0.9
12 x 12	304 x 304	2	2.5	1.1
14 x 14	356 x 356	2	3.25	1.5
16 x 16	406 x 406	2	4.0	1.8
18 x 18	457 x 457	2	5.5	2.5
20 x 20	508 x 508	2	9.0	4.1
24 x 24	610 x 610	2	12.0	5.4

Duct opening is same size as normal door opening  
For detailed specifications see submittal sheet

