

TD-5025

Specialty Access Door, *Recessed Access Door for Tile and Marble*

Application

- This recessed access door is ideal for use on tiled and marbled walls
- Door accepts tiles/marbles with grout gaps, harmoniously blending with surroundings
- Installed door remains invisible ensuring architecturally pleasing appearance

Product Features

- Zinc coated steel provides superior corrosion resistance
- Concealed heavy duty hinge
- Recessed door accepts Tiles and Marbles of varied thicknesses
- Concealed Latch

TD-5025 Access Door Specifications:

Material: 16 Ga Satin Coat Steel

Door: 16 Ga, 3/4" recessed tray to accept 5/8" MDF and glue by others


Frame: 16 Ga, press bent for strength and rigidity

Hinge: Continuous concealed piano hinge

Standard Lock: Cam Latch

Optional Lock: Touch Latch, Magnetic Lock

Finish: Powder coated RAL 9016

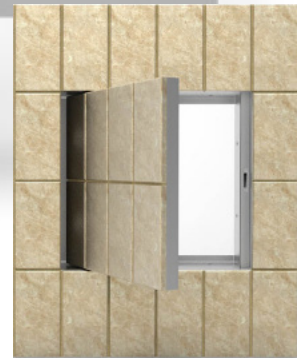

TD-5025 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
12 X 12	300 X 300	1	10	4.5
14 X 14	350 X 350	1	13	5.9
16 X 16	400 X 400	1	15	6.8
18 X 18	450 X 450	1	18	8.2
24 X 24	610 X 610	1	25	11.3
24 X 36	610 X 914	2	34	15.4

For detailed specifications see submittal sheet.

